





SHELLMAX

Fully Packaged, 3 Pass, Smoke Tube, Oil / Gas Fired Steam Boiler

Capacity Range 1000 to 16000 kg/hr **Standard Design Pressure**

10.54 & 17.5 kg/cm²g

Unique design features

- Corrugated furnace Increases heat transfer area, offers flexibility for thermal expansion and ensures minimal stress transfer to tube plate.
- Burner options Choice of Rotary Cup, Steam Atomised, Pressure Jet, Mono Bloc and Dual Bloc burners available to suit different customer requirements.

• Automation - High level automation to control water level, steam flow and water flow, is available as add on options. Programable Logic Controllers (PLC) with Supervisory Control and Data Acquisition (SCADA) system

• Efficiency enhancement - Optional accessories such as air preheater and economiser can be integrated with the main unit.



Corrugated furnace



Air Pre-heater


Technical specifications


can also be offered.

| Description | Unit | SM-10DH | SM-15DH | SM-20DH | SM-30DH | SM-40DH | SM-50DH | SM-60DH | SM-80DH | SM-100DH | SM-120DH | SM-140DH | SM-160DH |
|-------------------------------|------------------------|---|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Capacity (F&A 100°C) | kg / hr | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 | 6000 | 8000 | 10000 | 12000 | 14000 | 16000 |
| Design pressure (SVLOP) | kg / cm ² g | ² g 10.54 / 17.5 | | | | | | | | | | | |
| Efficiency | | As Per BS 845 Part 1 NCV Basis | | | | | | | | | | | |
| Furnace oil / Natural gas | % | 89 (without HRU), 92 (with APH - for FO), 94 (with Economiser - for NG) | | | | | | | | | | | |
| Fuel | | Furnace Oil / Natural Gas | | | | | | | | | | | |
| Fuel Firing System | | Pressure Jet, Duo Bloc (Make - Thermax Oertli) | | | | | | | | | | | |
| Fuel consumption | | Without HRU / With HRU | | | | | | | | | | | |
| Furnace Oil | kg / hr | 63/61 | 94/91 | 126/122 | 189/182 | 251/243 | 314/304 | 377/365 | 503/487 | 629/608 | 754/730 | 880/852 | 1006/973 |
| Natural Gas | Nm³ / hr | 71/69 | 107/104 | 143/138 | 214/207 | 286/276 | 338/357 | 428/406 | 571/541 | 714/676 | 857/811 | 999/946 | 1142/1081 |
| Connected Electrical Load | | 10.54/17.5 | | | | | | | | | | | |
| Furnace Oil (With APH) | kW | 16/17 | 16/17 | 18/19 | 26/28.5 | 28/30 | 37/40 | 40/44 | 50/59 | 58/67 | 71/75 | 78.5/86 | 86/93.5 |
| Natural Gas (With Economiser) | kW | - | - | - | - | - | 19.5/23 | 23/26.5 | 28/37.5 | 41.5/45.5 | 49/53 | 49/56.5 | 56.5/64 |
| Dimensions & Weight | | | | | | | | | | | | | |
| A | mm | 4221 | 4721 | 4971 | 5221 | 5822 | 6322 | 6894 | 7769 | 8419 | 8886 | 9509 | 10002 |
| В | mm | 2937 | 3027 | 3027 | 3160 | 3415 | 3415 | 3560 | 3713 | 3885 | 3995 | 4708 | 5049 |
| C | mm | 3273 | 3353 | 3353 | 3473 | 3773 | 3773 | 3923 | 4023 | 4223 | 4323 | 4573 | 4823 |
| D | mm | 1400 | 1850 | 2100 | 2200 | 2700 | 3200 | 3700 | 4350 | 4750 | 4700 | 5200 | 5200 |
| E | mm | 3280 | 3780 | 4045 | 4290 | 4830 | 5330 | 5880 | 6680 | 7180 | 7530 | 8130 | 8630 |
| F | mm | 1912 | 2042 | 2042 | 2090 | 2360 | 2360 | 2510 | 2610 | 2810 | 2910 | 3160 | 3290 |
| G | mm | 2160 | 2180 | 2180 | 2303 | 2660 | 2660 | 2812 | 2950 | 3112 | 3252 | 3537 | 3794 |
| A1 | mm | 7411 | 7922 | 8196 | 8693 | 9517 | 10280 | 11064 | 12018 | 13678 | 14008 | 15087 | 15904 |
| B1 | mm | 3478 | 3541 | 3530 | 3829 | 4115 | 4425 | 4708 | 4965 | 5235 | 4147 | 4660 | 4840 |
| C1 | mm | 3559 | 3559 | 3604 | 3742 | 3951 | 4221 | 4642 | 4786 | 5027 | 5300 | 5820 | 6223 |
| Chimney Top Diameter | mm | 350 | 400 | 450 | 450 | 500 | 600 | 650 | 700 | 800 | 850 | 950 | 1000 |
| Dry Weight (10.54 / 17.5) | tonne | 4.6/5.6 | 5.5/6.8 | 6/7.5 | 6.8/8.9 | 9.3/12 | 10.3/13.2 | 12.1/15 | 15/19 | 18.5/22.5 | 20.8/26 | 26/33 | 31/40 |
| Flooded Weight (10.54 / 17.5) | tonne | 8.5/9.5 | 11/12.5 | 11.6/13 | 13.7/15.6 | 19.5/21.9 | 21.1/24 | 25.6/28.3 | 30.8/34.5 | 38.6/42.6 | 43.2/48.5 | 54.2/61.2 | 66.2/75.2 |

Note: Design Standard-IBR.Efficiency is calculated based on NCV of Furnace Oil as 9650 kcal/kg and Natural Gas as 8500 kcal/Nm^o.Air Preheater (APH) is recommended for FO/ Firing and Economiser is recommended for NG firing. In case of Dual fuel burner option, Heat Recovery Unit (HRU) shall be selected on the basis of primary fuel. If economiser is selected for HRU, it is to be bypassed for FO firing Option. Above mentioned weight and dimensions may vary with actuals. Please refer to offer document for more details.

General arrangement



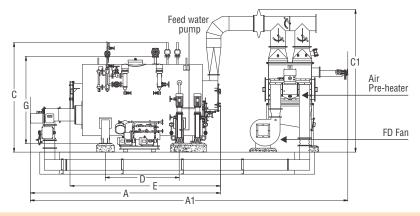



Registered Office

D-13, MIDC Industrial Area,

R. D. Aga Road Chinchwad, Pune - 411019, India Tel.: +91-20-66122999, 66155000, Fax: +91-20-27472049

Email: heating.enquiries@thermaxglobal.com

www.thermaxglobal.com

Toll free no. 1800-209-0115

REGIONAL OFFICES = New Delhi = Mumbai = Kolkata = Chennai = Ahmedabad

- Bangalore Hyderabad Pune Lucknow INTERNATIONAL OFFICES UK USA
- UAE = Germany = Belgium = Denmark = Russia = Saudi Arabia = Thailand = Malaysia
- Phillipines China Brazil Peru Chile Bangladesh Srilanka Kenya Nigeria

Thermax Business Portfolio

- Heating
- Cooling
- **Power Generation**
- Air Pollution Control
- Chemicals
- Water & Wastewater Solutions
- Solar
- **Specialised Services**

